



WINDOW CORP.

"Where Quality Rules"
Since 1955

ROUTE 100, P.O. BOX 166, PASCOAG, RI 02859
TEL: (800) 537-3061 FAX: (401) 568-2273
www.lockheedwindow.com

INSTRUCTIONS

FIELD APPLIED EXTENSION JAMB INSTALLATION APPLICATION FOR WHEN HORIZONTALLY MULLED WINDOW HEIGHTS EXCEED 84"

**THE EXTENSION JAMB WILL BE SHIPPED INSTALLED INTO THE EXTENSION
JAMB RECEIVER, AND WILL BE CUT AND NOTCHED.**


**STEP A: ATTACH HEADER EXTENSION JAMB AND RECEIVER AS ONE UNIT
TO WINDOW MAIN FRAME. FASTEN WITH 3/8" STAINLESS STEEL STAPLES.
STAPLES MUST PENETRATE RECEIVER FLANGE AND WINDOW MAIN FRAME.
SEE APPLICATION INSTRUCTION (OVER).**

STEP B: FOR JAMBS AND/OR SILLS – SAME NOTE AS ABOVE APPLIES.

**NOTE: FOR WINDOW UNITS THAT HAVE FOUR SIDED EXTENSION JAMBS THE SILL
EXTENSION JAMB MUST BE ASSEMBLED PRIOR TO JAMB EXTENSION JAMBS.**

(OVER)

INSTRUCTIONS FOR FIELD APPLICATION OF EXTENSION JAMBS
(DOUBLE HUNG SHOWN FOR INFORMATION PURPOSE)

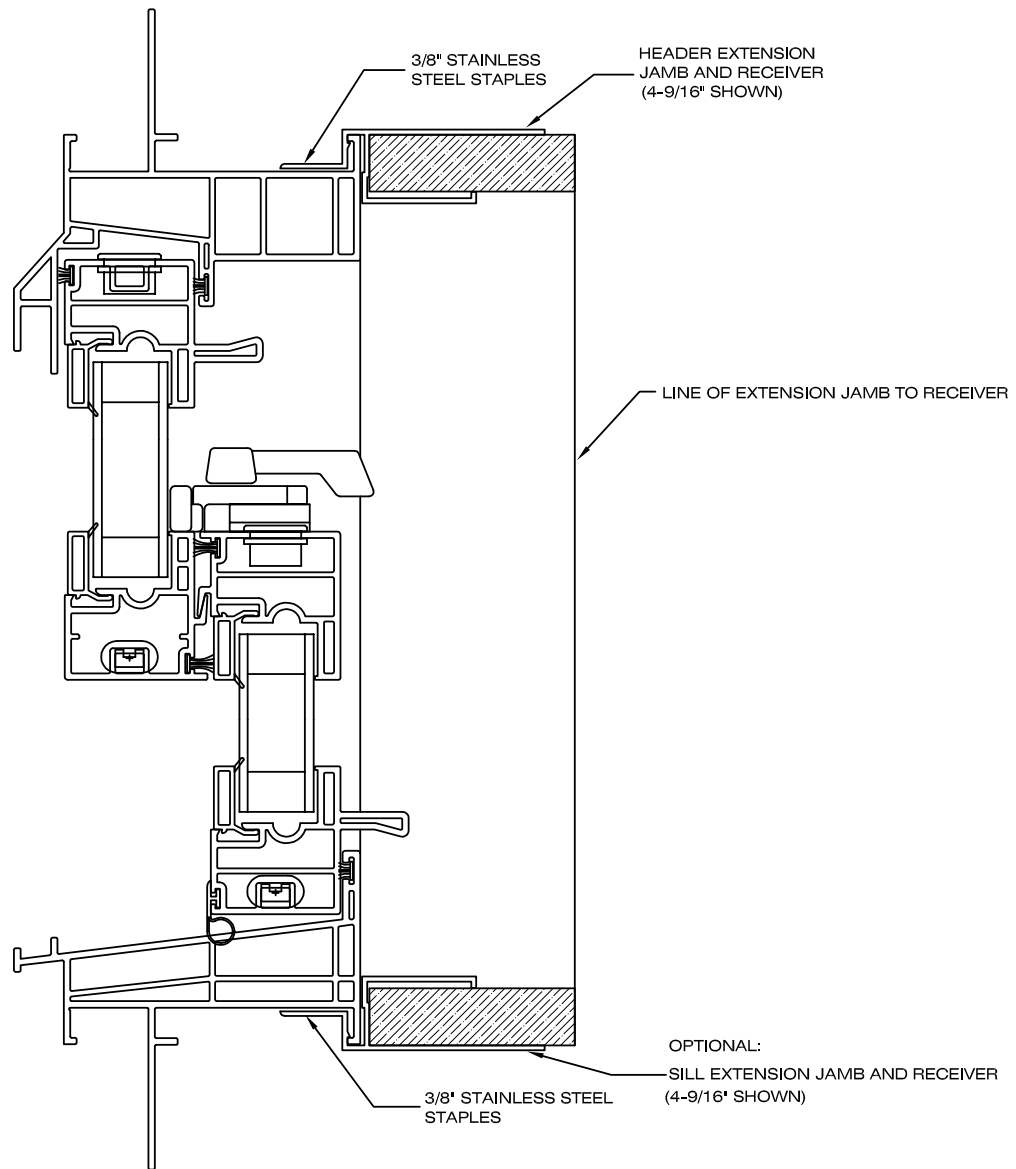

NOT TO SCALE



WINDOW CORP.

Route 100, Pascoag, Rhode Island 02859

TEL: (401) 568-3061

FAX: (401) 568-2273

www.lockheedwindow.com

Form #570
Rev 1/09

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE